
# VALUE KVM Extender over Cat. 6/6A, HDMI, 4K@30Hz, max. 40m

| | |
|---|---|
| **Product No.** | 14.99.3043 |
| **Manufacturer** | VALUE |
| **Manufacturer No.** | 14.99.3043 |
| **EAN (single piece)** | 7630049633438 |





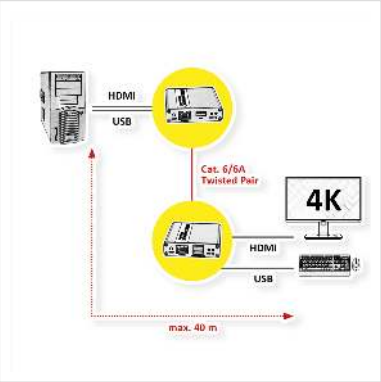


**KVM Extension over a Cat. 6/6A/7 network cable of up to 70 meters at a resolution of 1080p@60Hz and up to 40 meters at a resolution of 4K@30Hz - perfect for advertising, monitoring systems, home entertainment, conferences, etc.**

• Supports KVM functionality
• Resolution up to 4K@30Hz
• Transmission distance: 1080p@60Hz up to 70m, 4K@30Hz up to 40m, by using Cat. 6 or higher network cables
• Supports HDR10
• Automatically adjusts parameters to match different network cables and achieve the best display performance
• No latency
• Plug & Play

• Supports PoC (Power over Cable) - receiver is supplied via the transmitter
• Transmitter (TX) ports: 1x HDMI, 1x RJ-45, 1x USB A
• Receiver (RX) ports: 1x HDMI, 1x RJ-45, 2x USB A
• Dimensions Transmitter/Receiver (each): 20 x 60 x 75 mm
• Weight Transmitter/Receiver (each): 123 g
• Contents: Transmitter, Receiver, Power Supply DC 5V 2A, USB Cable A-A, User Manual

| Technical specifications | |
|---|---|
| Manufacturer | VALUE |

| | |
|---|---|
| Product group | KVM (IP) extensions |
| Product type | KVM-Extender, HDMI |
| Colour | black |
| Scope of delivery | Transmitter, Receiver, Power Supply DC 5V 2A, USB Cable, User Manual |
| Interface | HDMI |
| Inputs | 2 |
| Outputs | 3 |
| Max. distance | 40 m |
| PC/Switch: monitor connection | HDMI |
| PC/Switch: mouse/keyboard connection | USB |
| Remote Console: Monitor connection | HDMI |
| Remote Console: Mouse/Keyboard connection | USB |
| Max. distance local-remote unit | 40 |
| Max. resolution (nominal) | 3840 x 2160 @30Hz (max.) |
| Colour (Design profile) | black |
| Material (casing) | metal |
| Dimensions (HxWxD) | 20 x 60 x 75 mm |
| Power supply unit required | yes |
| Power supply output | DC 5V 2A |
| Mains connection | Appliance Europlug, Type-C |
| Operating temperature min. | -20 °C |

| | |
|---|---|
| Operating temperature max. | 60 °C |
| Storage temperature min. | -30 °C |
| Storage temperature max. | 70 °C |
| Height | 20 mm |
| Width | 60 mm |
| Depth | 75 mm |
| Weight | 246 g |
| Height of packaging (single piece) | 90 mm |
| Width of packaging (single piece) | 280 mm |
| Depth of packaging (single piece) | 320 mm |
| Package weight (single piece) | 0.5 kg |